710 SERIES

- Size range: 2" to 12"
 Consult factory for larger sizes
- Temperature range (-)60°F to +250°F Consult factory for higher temperatures
- Conforms to all applicable standards
 API 609, DIN 3202,ISO 5752, BS EN593
- ANSI B16.5 CLASS 150 Flange drilling

Other drillings available

PTFE / PFA Lined Composite Body






710 SERIES

Features

PTFE / PFA Lined Composite Body

Strong Light Weight Zero Corrosion

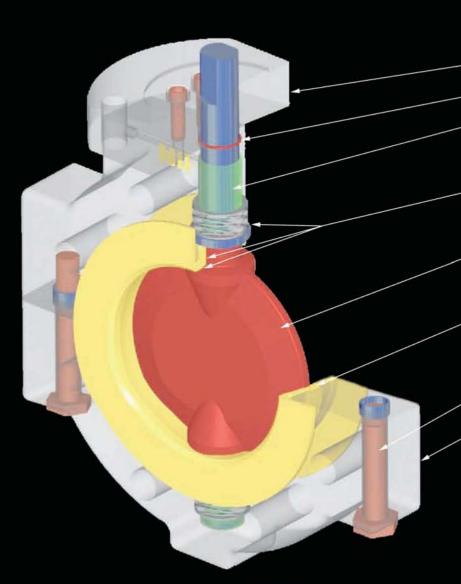

ISO 5211 mounting flange

Atmospheric stem seal

PTFE composite bearing top & bottom never needs lubrication

Energized Triple stem seals top & bottom for leak free service

PFA / CD4MCu s.s. one piece disc with double "D" shaft drive. Other disc materials available

PTFE seat is .125" Thick, energized by non-wetted elastomer for bubble tight shut-off

PTFE coated B7 fasteners.

Valve body is manufactured from advanced fiber reinforced vinyl ester resin that is as strong as steel, 1/2 the weight of ductile iron and will never corrode. Guaranteed!

Body configurations include flange wafer or lug style



4855 Broadmoor Ave. Kentwood, MI 49512 (616)-554-3100 - Fax (616) 554-5623 www.nilcor.com